


FIG. 2

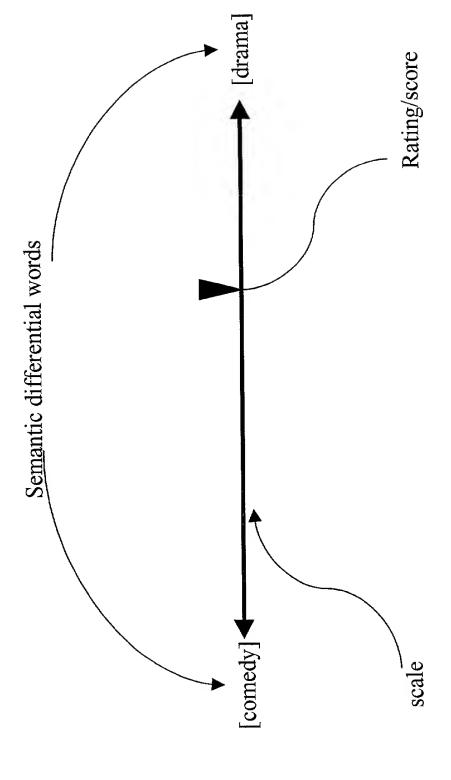

FIG

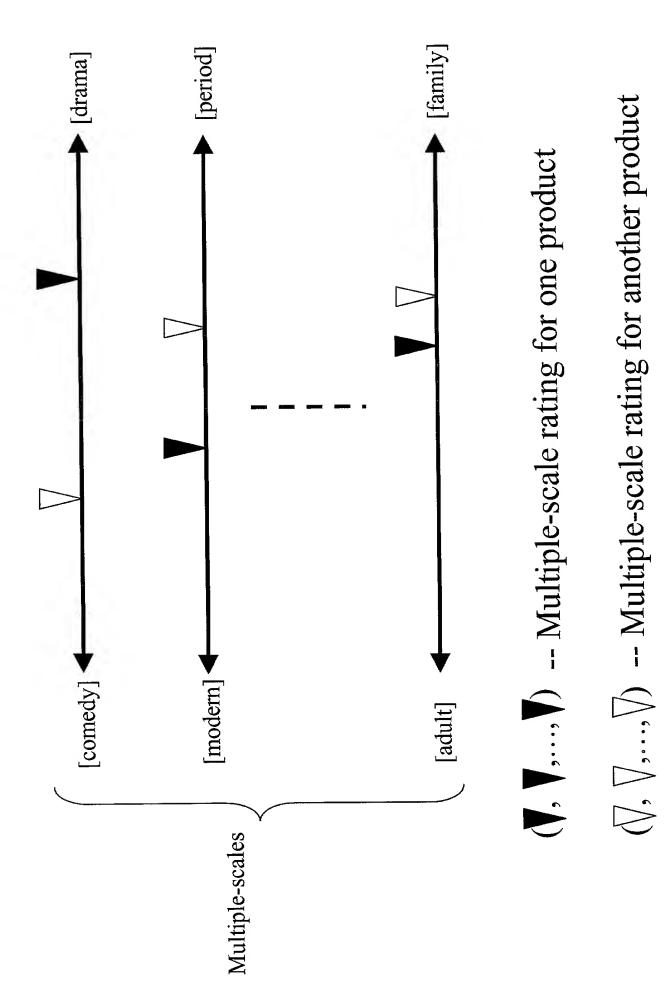


FIG. 4


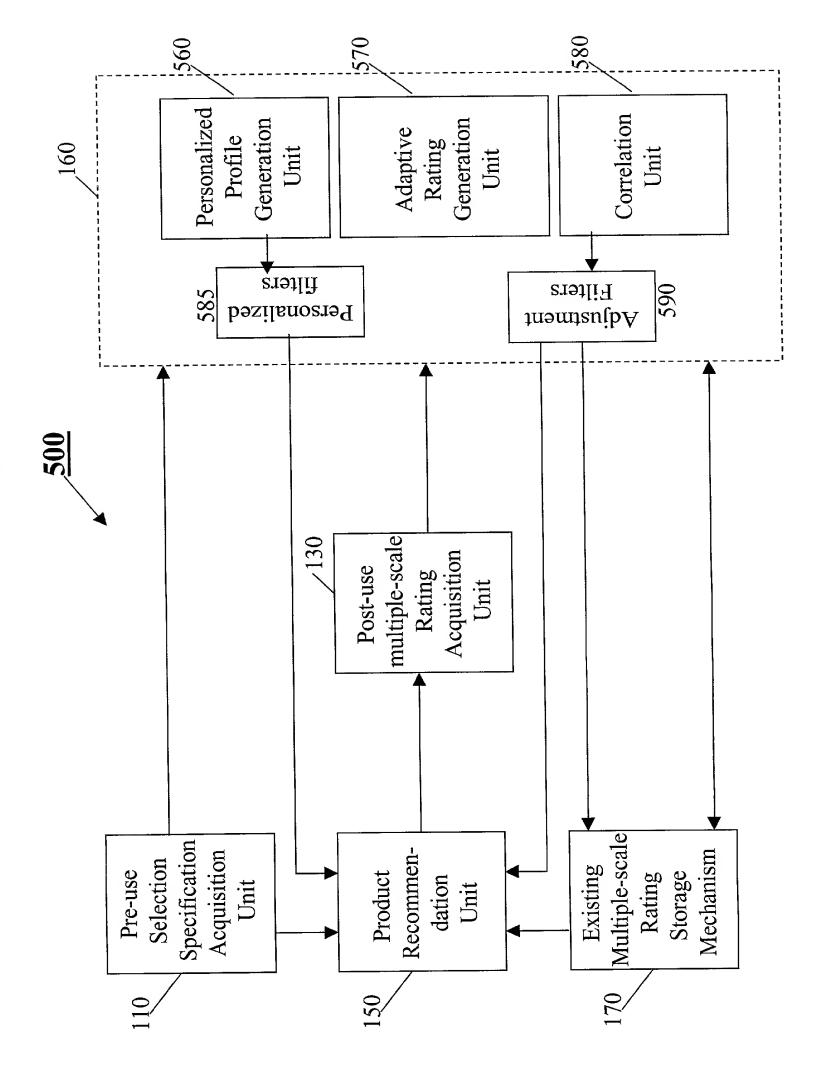


FIG.

FIG. 6

F . 1 . F

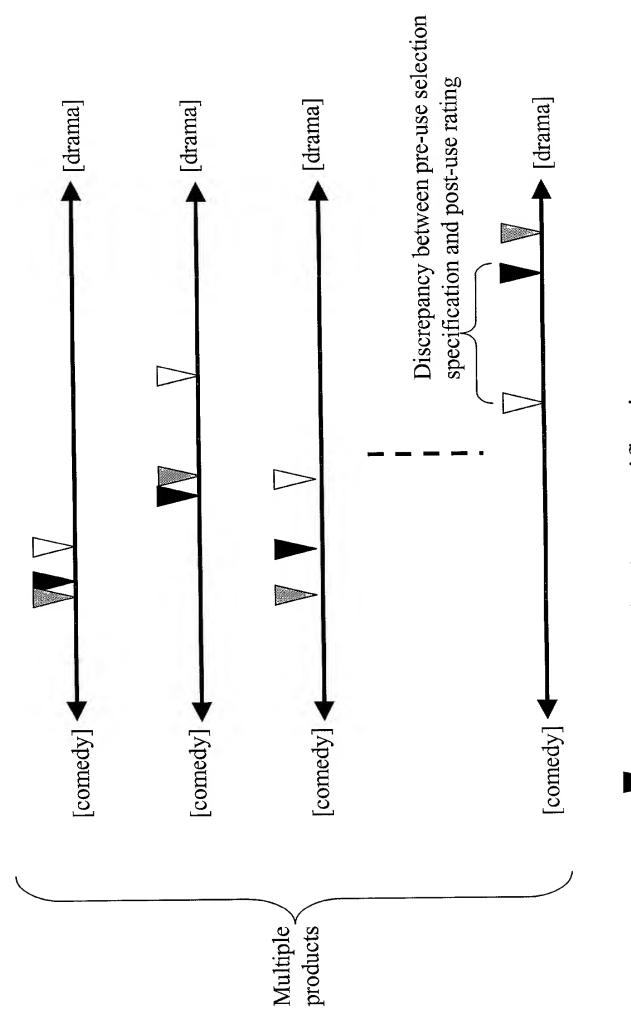

: pre-use selection specification

/ : post-use rating

FIG. 7

805

2 (: 3 ***** (; r

820

§10

-840

830


~850


Save multiple-scale

personalized filter


FIG. 8


% (± ≥

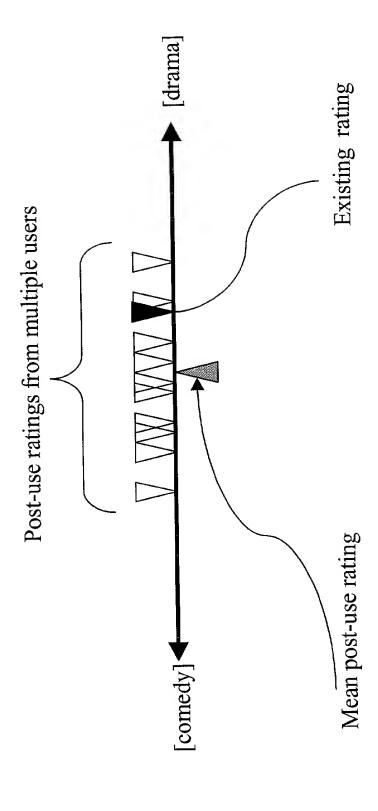

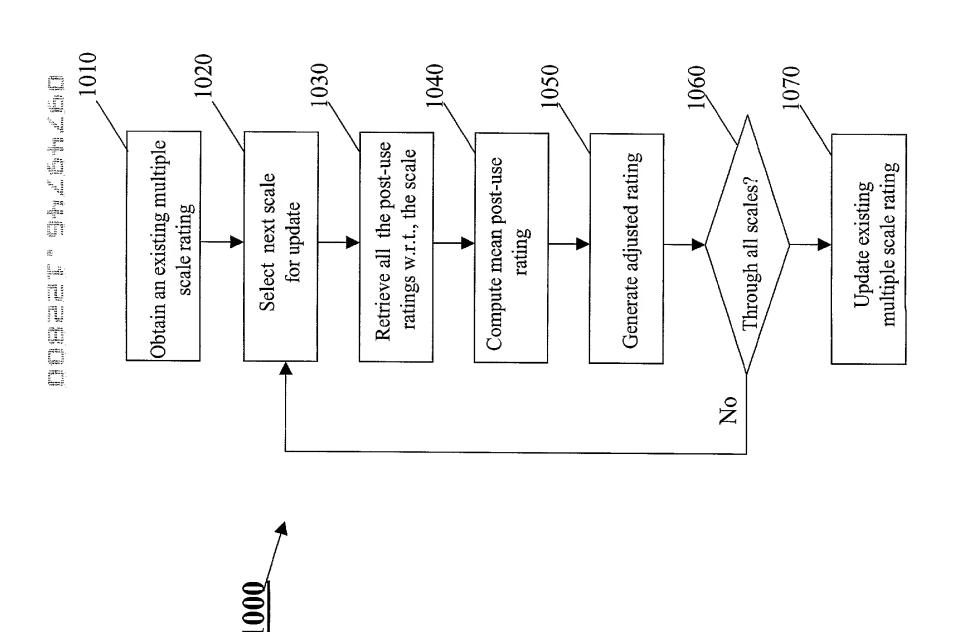

5. (1) %

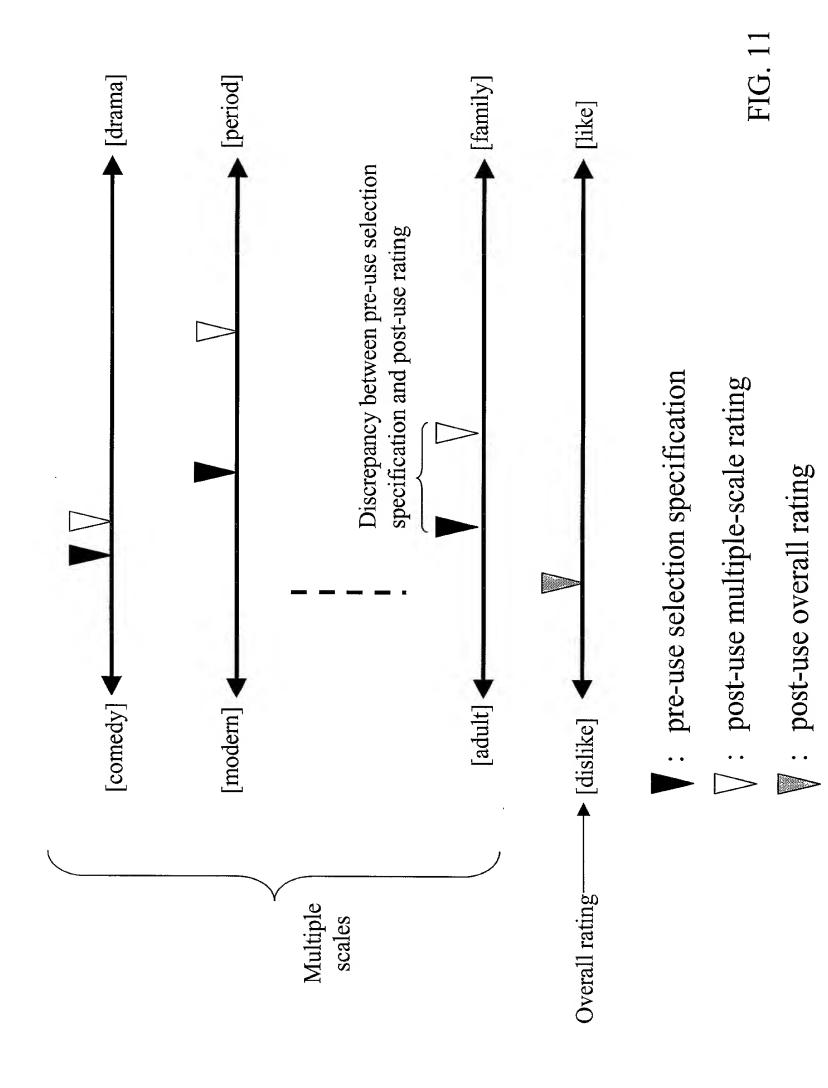

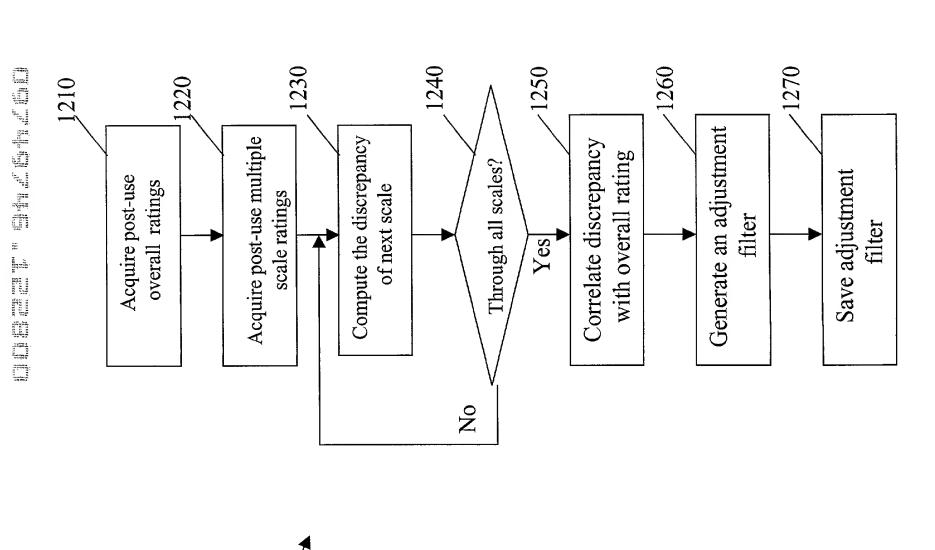

on distribution

4 1 E